



Rim Clamp

For tough reforming jobs

The Sawyer Value

- From sizes 4"–72"+
- Reform 45,000 PSI tensile strength pipe up to Schedule 80
- For out-of-round conditions up to 2" (51 mm), depending on wall thickness
- Pivot points are made from stainless steel, one clamp will work for all applications
- Heavy duty latching mechanism
- Hinged flip-up jackbars allow for simple pipe mating and allow for full 360° welding
- Jackscrew Setting Gauge makes initial setup easy
- Torque wrench supplied for accurate reforming pressure



Rim Clamp
(258)

**Reform 45,000
PSI tensile
strength pipe up
to Schedule 80**

**Hi-lo for
out-of-round
conditions
up to 2"**

Model No.

258-0406
258-0608
258-0810
258-1012
258-1420
258-2026
258-2228
258-3036
258-3440
258-4248
258-4450
258-4652
258-5056
258-6672

Description

Rim Clamp 4-6"
Rim Clamp 6-8
Rim Clamp 8-10
Rim Clamp 10-12
Rim Clamp 14-20
Rim Clamp 20-26
Rim Clamp 22-28
Rim Clamp 30-36
Rim Clamp 34-40
Rim Clamp 42-48
Rim Clamp 44-50
Rim Clamp 46-52
Rim Clamp 50-56
Rim Clamp 66-72


Est. Shipping Wgt.

Call for dimensions
Call for dimensions
Call for dimensions
280 lbs. 127 kg
330 lbs. 149.69 kg
360 lbs. 163.30 kg
370 lbs. 167.83 kg
450 lbs. 204.12 kg
475 lbs. 215.45 kg
580 lbs. 263.08 kg
600 lbs. 272.15 kg
760 lbs. 344.73 kg.
790 lbs. 358.34 kg
885 lbs. 401.43 kg

*Ultra Rim Clamp 258U available in all above sizes

30 Seconds (or less!) Sales Statement:


The Sawyer Rim Clamp is designed for tough reforming jobs. The Rim Clamp reforms 45,000 PSI high tensile pipe up to Schedule 80, with out-of-round conditions up to 2" (51 mm), depending on wall thickness. The multiple jackscrews give the operator the ability to apply precise reforming pressure where it is needed most. The hinged flip-up jackbars allow for simple pipe mating and 100% weld and/or grinding without removing the clamp. The clamp comes with a Jackscrew Setting Gauge which saves considerable time and effort in trying to balance the clamp once it's in position.

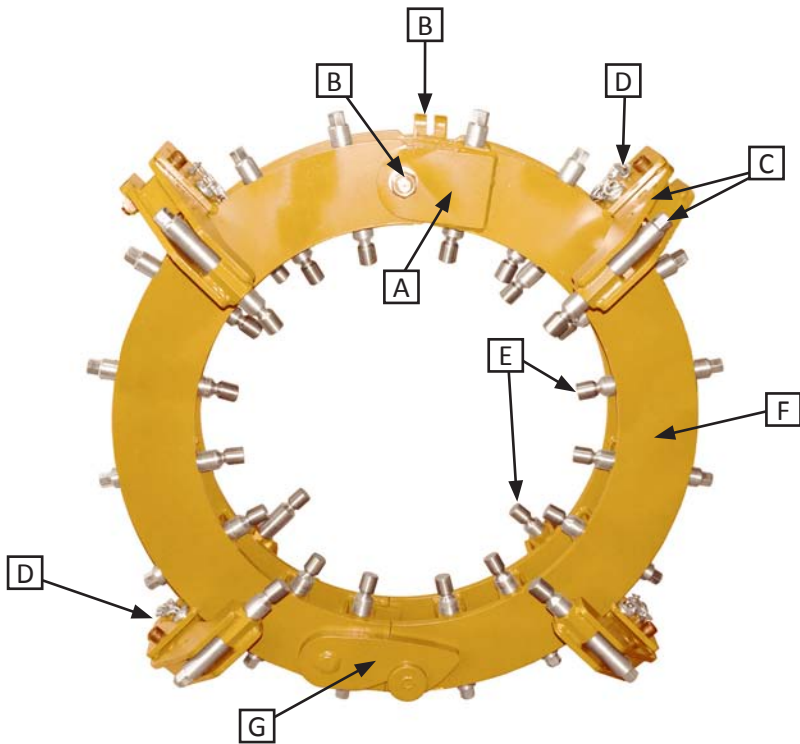

Parts Diagram

- | | |
|--|---|
| <ul style="list-style-type: none"> A. Hingeplate B. Hinge Pin C. Adjustable Jackbar with Jackscrews D. Jackbar Latch Pin E. Reforming Jackscrews F. Main Frame | <ul style="list-style-type: none"> G. Locking Hook H. Hook Release Chain* I. Stable Jackbar with Jackscrews* J. Level and Support Hook K. Lifting Chain* |
|--|---|
- *not shown - on backside of clamp

For Additional Resources:

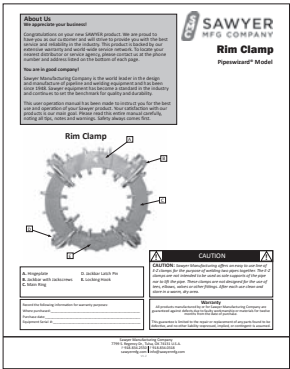

Contact Sawyer Mfg. Co for the Rim Clamp Manual and Marketing Material
<http://www.sawyerfmfg.com>